



Stucco Renovation System

09 96 63

Direct Applied Exterior Finish System

Features & Benefits

- Easily Applied
- Suitable for Interior or Exterior
- Class A Fire Rating


System Use

- Commercial
- Residential

Attachment Method

- Adhesive

Master Wall Inc.® Stucco Renovation System (SR) renovates and protects existing stucco surfaces. Renovation methods vary and can include a leveling base coat, a waterproof base coat, reinforcing mesh to bridge cracking, Primecoat Primer and either our Superior, Superior Elastomeric Plus or specialty finishes.

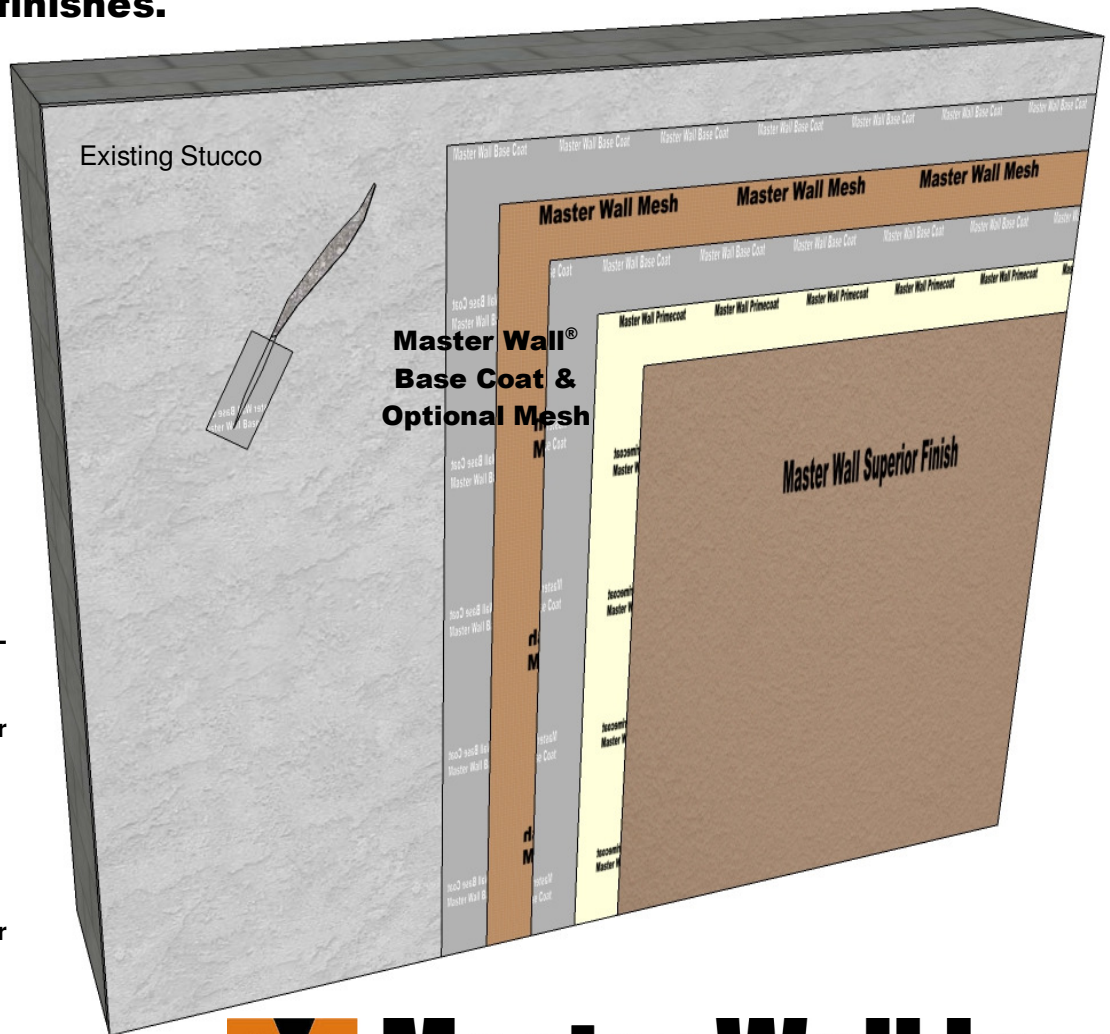

Warranty Options

- Base Coat and Superior Finish: 5 years
- Base Coat, Mesh and Superior Finish: 6 years
- Base Coat, Mesh, Primecoat Primer and Superior Finish: 7 years
- WeatherStop Base Coat, Mesh, Primecoat Primer and Superior Finish: 8 years
- Base Coat, Mesh, Primecoat Primer and Superior Elastomeric Plus Finish: 9 years
- WeatherStop Base Coat, Mesh, Primecoat Primer and Superior Elastomeric Plus Finish: 10 years.

Master Wall Inc.®
Building a Culture of Excellence

masterwall.com

PO Box 397 • Fortson • GA • 31808 • 800-755-0825 • Tech: 800-760-2861



Stucco Renovation System

Short Form Specification

1.0 General

This is a short form specification. Refer to Stucco Renovation specifications and details for additional information.

1.1 System Description

The Master Wall Inc.® Stucco Renovation System consists of a leveling base coat, optional reinforcing mesh and a textured finish.

1.2 Design Requirements:

- A. Reference architectural drawings for specific detail requirements.
- B. Slope all surfaces a minimum of 1:2 (6" in 12") to shed water, maximum 12" (305mm) wide.
- C. Maximum deflection of substrates shall not exceed L/360.
- D. Typical acceptable substrates include unpainted brick, masonry, concrete and Portland cement plaster (stucco). Contact Master Wall® for other approved substrates.
- E. Expansion joints are required at building expansion joints, panel joints and other areas where significant movement occurs.
- F. If used over retaining walls, the wall shall be waterproofed with drainage provisions.
- G. Protect wall surfaces with an appropriate leak proof cap.

1.3 Quality Assurance

- A. The coatings shall be tested for: Accelerated weathering, mildew resistance, salt spray resistance and structural performance.
- B. The coatings shall have been tested for fire performance in accordance with ASTM E84.

1.4 Job Conditions

- A. Store all materials protected from weather and direct sunlight at temperatures above 40°F (5°C).
- B. The ambient and wall temperature shall be a minimum of 40°F (5°C) and shall remain so for at least 24 hours after installation.

2.0 Products

All components of the Stucco Renovation System shall be manufactured by Master Wall and supplied by an authorized distributor.

A. Master Wall® Base Coats:

1. Foam & Mesh Adhesive (F&M), F&M Plus: A 100% pure acrylic-based adhesive that is field mixed with Portland cement.
2. Master Wall® Bagged Base (MBB), MBB Plus: A ready to use dry base that is field mixed with water.
3. WeatherStop: An acrylic-based weatherproof base coat product mixed one-to-one by weight with Portland cement designed for use with reinforcing mesh as the base coating over the substrate and insulation board.
4. Guardian: A waterproof 100% pure acrylic-based fiber reinforced adhesive that is field mixed with Portland cement.

B. Superior Finish: 100% pure acrylic formulation with integral color and texture. Perfect Swirl 2.0 (Perfect), Fine Sand 1.0 (Spray), Medium Sand 1.5 (Desert Sand), Versatex 0.5 (Refinish) textures.

C. Specialty Finishes: Specialty finish blends of natural and man-made decorative specialty finishes and accents.

D. Master Wall® Coatings:

1. Primecoat/Sanded Primecoat: A water-based primer.
2. Roller-flex: A water-based architectural finish coating.

3.0 Installation

- A. Inspect the substrate to ensure that it is free of all foreign materials that would affect the adhesion of the Stucco Renovation System.
- B. Apply the products in strict accordance with Master Wall® specifications, product data sheets, architectural drawings and architectural specifications.

We finish strong.

Information contained in this product data sheet conforms to the standard detail recommendations and specifications for the installation of Master Wall Inc.® products and is presented in good faith. Master Wall Inc.® assumes no liability, expressed or implied as to the architecture, engineering, or workmanship of any project. This information may be concurrent with, or superseded by other applicable documents, such as specifications and details. Contact Master Wall Inc.® for the most current product information. ©2017 Master Wall Inc.®

 **Master Wall Inc.®**
Building a Culture of Excellence
masterwall.com

PO Box 397 • Fortson • GA • 31808 • 800-755-0825 • Tech: 800-760-2861