


# Project Submittal Package

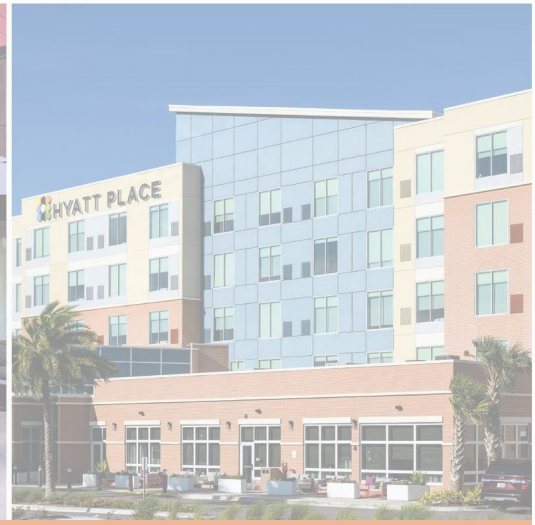

Project:

Location:

Architect:

General Contractor:

Applicator:



## Master Wall Inc.®



[System Data Sheets](#)   [Product Data Sheets](#)   [Sample Warranty](#)  
[Specifications](#)   [Details](#)   [Web Link \(click here\)](#)

PO Box 397

Fortson

GA

31808


800-755-0825

[masterwall.com](http://masterwall.com)

# Cemplaster Fiberstucco Base5

**Great performing basic stucco system with a competitive price**

- **Durable Cemplaster Fiberstucco with fibers for better crack resistance**
- **Primecoat Primer for improved adhesion and color retention**
- **Superior Finish with Dirt Pickup Resistant polymers**
- **Upgraded lath for a long lasting system**
- **5-year labor/material warranty**

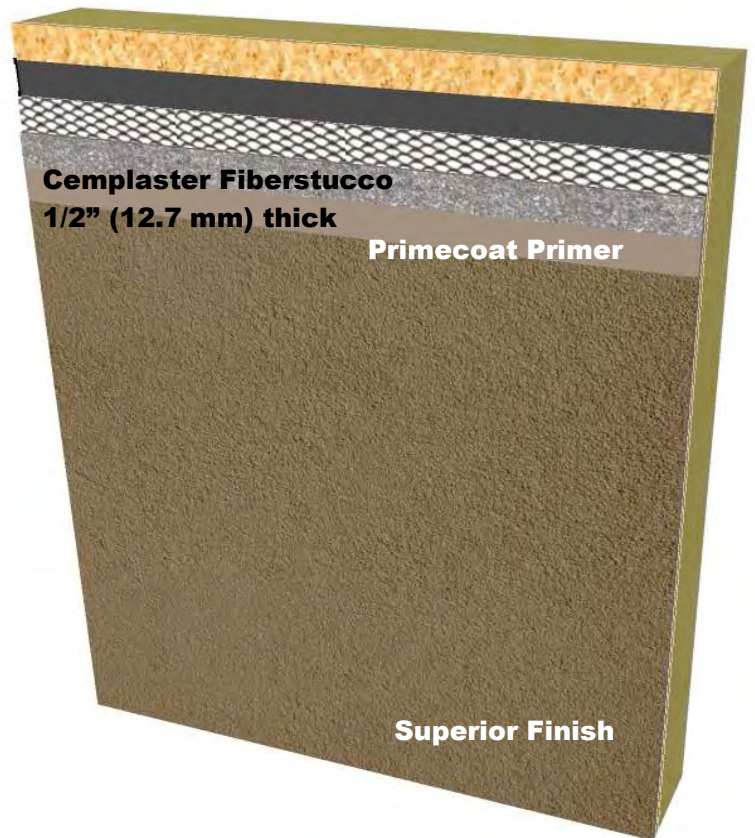

**System Specification includes:**

- **Cemplaster Fiberstucco 1/2" (12.7 mm) thick with 2.5#/sy metal lath**
- **Primecoat Primer**
- **Superior Finish**

Member

**NOCSA**

**masterwall.com**

Corporate Office P.O. Box 397 Fortson, GA 31808 800.755.0825



# Cemplaster Fiberstucco Base 5 System

## Short Form Specification

### PART 1 GENERAL

Materials and installation of a Master Wall® Cemplaster Fiberstucco system.

### PART 2 PRODUCTS

#### 2.01 MANUFACTURERS

A. Master Wall Inc.®, Cemplaster Fiberstucco Base 5 System.

2.02 MOISTURE BARRIER (WRB) (supplied by various manufacturers) : WRB01 Minimum 2-layers of 15-lb/100 ft<sup>2</sup> (0.683 kg/m<sup>2</sup>) vapor permeable asphalt saturated felt in compliance with ASTM D 226, Type I or similar in accordance with building code.

2.03 Cemplaster Fiberstucco (CFS): Master Wall® Cemplaster Fiberstucco factory proportioned, fiber reinforced Portland cement based stucco for trowel or pump application, field mixed with graded sand (ASTM C 897) and water, Master Wall® Ready Cemplaster Fiberstucco factory proportioned, fiber reinforced Portland cement based stucco for trowel or pump application, field mixed with water. Installed thickness shall be: 1/2" (12.7 mm) CFS02, CFS03.

2.04 PRIMER (PRIME): PRIME01 Master Wall® Primecoat or Sanded Primecoat: acrylic-based tinted primer.

2.05 FINISH COAT (FIN): FIN01 Superior Finish: Master Wall Inc.® Superior Finishes using Dirt Pickup Resistant (DPR) polymers. The following textures are available: Perfect2.0, Fine Sand 1.0, Medium Sand 1.5, Versatex 0.5.

2.06 LATH (supplied by others; select one depending on type construction): CFS03, 1/2" thick Cemplaster Fiberstucco Minimum 2.5 lb./yd<sup>2</sup> (1.4 kg/m<sup>2</sup>) self-furred galvanized steel diamond mesh metal lath in compliance with ASTM C 847. Striplath Minimum 4" x 12" (102 mm x 305 mm), in types and weights noted above.

#### 2.07 MECHANICAL FASTENING & ATTACHMENT (by others)

Appropriate non-corroding fasteners, depending on the type framing or substrate:

Wood Framing--minimum 11 gauge, 7/16 inch (11 mm) diameter head galvanized roofing nails with minimum 3/4 inch (19mm) penetration into studs or minimum #8 Type S wafer head fully threaded corrosion resistant screws with minimum 3/4 inch (19 mm) penetration into studs.

Steel Framing—minimum #8 Type S or S-12 wafer head fully threaded corrosion resistant screws with minimum 3/8-inch (9.5 mm) penetration into studs.

Concrete or Masonry—minimum # 8 wafer head fully threaded corrosion resistant screws for masonry with minimum 1 inch (25 mm) penetration into substrate and approved corrosion resistant hand, power or powder actuated stud nails with a minimum 3/8" (9.5 mm) heads.

For stainless steel, use washers with galvanized fasteners or use stainless steel fasteners to avoid galvanic reaction.

Tie Wire—18 gauge galvanized and annealed low-carbon steel in compliance with ASTM A 641 with Class I coating, 18 ga stainless steel wire for stainless steel lath and accessories.

#### 2.08 ACCESSORIES (by others)

Weep screed, casing bead, corner bead, cornerite, corner lath, expansion and control joint accessories. All accessories shall meet the requirements of ASTM C 1063 and its referenced documents: PVC plastic in compliance with ASTM D 1784, cell classification 13244C, Zinc in compliance with ASTM B 69, Galvanized metal in compliance with ASTM A 653 with G60 coating, 304 stainless steel trim manufactured in accordance with ASTM C841. All accessories shall have perforated or expanded flanges and shall be designed with grounds for the specified thickness of the Cemplaster Fiberstucco.

#### 2.09 JOB MIXED INGREDIENTS

Water: Clear, clean and potable without any foreign matter in the solution that may affect the color and setting qualities of the cement, adhesive, base or finish coat. Sand: Clean, well graded sand free of deleterious materials in compliance with ASTM C 897. Cement: Type I or I-II Portland cement meeting ASTM C-150.

#### 2.10 MIXING

Mix products in accordance with manufacturer's recommendations.

### PART 3 EXECUTION

#### 3.01 INSTALLATION

Install products in strict accordance with manufacturer's written installation instructions.

Information contained in this product data sheet conforms to the standard detail recommendations and specifications for the installation of Master Wall Inc.® products and is presented in good faith. Master Wall Inc.® assumes no liability, expressed or implied as to the architecture, engineering, or workmanship of any project. This information may be concurrent with, or superseded by other applicable documents, such as specifications and details. Contact Master Wall Inc.® for the most current product information. ©2016 Master Wall Inc.®



**PO Box 397 • Fortson • GA • 31808 • 800-755-0825 • Tech: 800-760-2861**



# Master Wall Inc.®

***Building a Culture of Excellence***

## **Master Wall Cemplaster Fiberstucco Base 5 System**

### **5 Year Labor & Material Limited Warranty**

Master Wall Inc. warrants the properly designed and installed Cemplaster Fiberstucco system and materials for 5 years from the date of installation. Master Wall Inc.'s exclusive liability under this warranty is to supply replacement materials and labor or corrective procedures, if it is shown that the materials supplied by Master Wall Inc., were defective when installed by the Master Wall Inc. certified applicator. Remedies shall be solely determined by Master Wall Inc. and no other warranties are expressed or implied. For a valid warranty, the system and products must be installed in accordance with Master Wall Inc.'s written recommendations, specifications, details, bulletins and other project-specific written recommendations. Master Wall Inc. must be notified in writing within 10 business days of the original discovery of the defect.

Master Wall Inc., is not responsible for structural conditions, design conditions beyond those noted in our literature, architecture, engineering or workmanship of any project. The Cemplaster Fiberstucco system may have hairline cracks, spalling, fastener popping or efflorescence, which are not considered product defects. Materials must be properly stored and applied in a timely manner. Workmanship, aesthetics and installation are beyond the scope of this warranty as are any deviations from Master Wall Inc. Documents not specifically approved in writing.

Abuse, misuse, excessive weather or environmental conditions beyond what the products or systems have been tested, designed or approved for is expressly limited. Certain colors with organic pigments are less fade-resistant than others. The building, system and products must be properly maintained in accordance with Master Wall Inc., documents, local environmental conditions and good building practices. In no case is Master Wall Inc. responsible for incidental and consequential damages.

**This warranty becomes effective only when all bills for the components of the system have been paid.**

**Except as stated, Master Wall, Inc., expressly disclaims any warranty of merchantability or fitness for a particular purpose. The above remedies are to be deemed exclusive.**

Project:

Applicator:

Warranty Date:

This is not the final warranty. For a valid warranty click on the support tab at [masterwall.com](http://masterwall.com) and request a warranty. Warranties are not valid until issued.

# PRODUCT AND SYSTEM TESTING



**Master Wall Inc.**  
Building a Culture of Excellence



## MASTER WALL® SYSTEMS SPECIFICATION FACT SHEET

- Manufacturer of EIFS, Stucco and Coatings since 1987
- Committed and focused specifically on our industry; privately held and American owned.
- Pioneer in CIFS® (Continuous Insulation and Finish Systems)
- Leader in specialty finishes; CIFS® Wood Grain, CIFS® Brick, Hydrophobic Finishes, Metallics, SuperiorCote coatings
- AWCI Certified EIFS Professional (CEP) accredited Sales and Technical Force
- AIA MasterSpec listed, AIA CES Registered Provider
- Industry Leadership
  - EIMA (EIFS Industry Members Association) – Manufacturer Member and Current President
  - NOCSA (National One Coat Stucco Association) – Manufacturer Member and Current President
  - SMA (Stucco Manufacturer's Association) – Manufacturer Member and Board Member
  - ABAA (Air Barrier Association of America) – Manufacturer Member
  - AWCI (Association of the Wall and Ceiling Industry) – Member
  - FWCCA (Florida Wall & Ceiling Contractors Association) – Member
- Code Compliant EIFS, CIFS® Stucco and Air Barrier Systems (ICC, Miami Dade and Florida Building Code recognized systems)
- Full-service product support including sales and technical aspects of your project
- Labor and Material Limited Warranties exceeding other manufacturers ranging up to 20 years including Single-source envelope warranties with approved Sealant manufacturers.
- DuroTone High Performance Tint Pigments for Improved Color Retention (5-year fade warranty)
- Manufacturing strategically located in Stonecrest GA, Brookshire TX and Payson UT
- Nationwide distributor network that serves most major markets



**Master Wall Inc. continuously tests our products and systems to meet the most current building codes.**

| <b>FIRE TESTING</b>   |   |  |   |
|---|---|--|---|
| <b>Test</b>   | <b>Test Method</b>  | <b>Criteria</b>  | <b>Results</b>  |
| Fire Resistance   | ASTM E119   | No effect on the fire resistance of a rated wall assembly  | See Technical Bulletin MW#168-030111 for assemblies   |
| Ignitability  | NFPA 268 (BOCA 99/1407.0)                                   | No ignition at 12.5 kw/m <sup>2</sup> at 20 minutes  | Pass  |
| Intermediate Multi-Story Fire Test                                  | NFPA 285 (UBC 26-9)   | <ol style="list-style-type: none"> <li>1. Resist flame propagation over the exterior surface</li> <li>2. Resist vertical spread of flame within combustible core/component of panel from one story to the next</li> <li>3. Resist vertical spread of flame over the interior surface from one story to the next</li> <li>4. Resist lateral spread of flame from the compartment of fire origin to adjacent spaces</li> </ol> | Pass  |
| Surface Burning Characteristics—<br>Base Coat, Mesh and Finish      | ASTM E84  | All components shall have a: Flame Spread < 25<br>Smoke Developed < 450  | Flame Spread = 0<br>Smoke Developed = 0   |
| Surface Burning Characteristics—<br>Rollershield                    | ASTM E84  | All components shall have a: Flame Spread < 25<br>Smoke Developed < 450  | Flame Spread = 5<br>Smoke Developed = 5   |
| Heat and Smoke Release Rates for<br>Rollershield Air/ Water Barrier | ASTM E1354, IBC Section 1403.5,<br>Exception 2 Requirements | Peak Heat Release Rate <150 kWm <sup>2</sup><br>Total Heat Release Rate <20 MJ/m <sup>2</sup> ,<br>Effective Heat of Combustion <18 MJ/kg  | RS: Peak Heat Release Rate = 32 kWm <sup>2</sup> , Total Heat Release Rate = 3.6 MJ/m <sup>2</sup> , Effective Heat of Combustion = 2.5 MJ/kg, VB: Peak Heat Release Rate = 336 kWm <sup>2</sup> , Total Heat Release Rate = 8.8 MJ/m <sup>2</sup> , Effective Heat of Combustion = 9.3 MJ/kg |

| <b>MESHES AND INSULATION BOARD</b>                        |                                   |   |                |
|---|-----------------------------------|---|----------------|
| <b>Test</b>   | <b>Test Method</b>                | <b>Criteria</b>   | <b>Results</b> |
| Reinforcing Mesh<br>Alkali Resistance of Reinforcing Mesh | ASTM E2098 (formerly EIMA 105.01) | >21dN/cm (120 pli) retained tensile strength after exposure | Pass           |
| EPS (Physical Properties)                                 |                                   |   |                |
| Density   | ASTM C303, D1622                  | 15.2-20.0 kg/m <sup>3</sup> (0.95-1.25 lb/ft <sup>3</sup> ) | Pass           |
| Thermal Resistance  | ASTM C177, C518                   | 4.0 @ 4.4 °C (40 °F)  | Pass           |
| Water Absorption  | ASTM C272                         | 3.6 @ 23.9 °C (75 °F)                                       |                |
| Oxygen Index  | ASTM D2863                        | 2.5 % max. by volume  | Pass           |
| Compressive Strength                                      | ASTM D1621 Proc. A                | 24% min. by volume  | Pass           |
| Flexural Strength   | ASTM C203                         | 69 kPa (10 psi) min.  | Pass           |
| Flame Spread  | ASTM E84                          | 172 kPa (25 psi) min.                                       | Pass           |
| Smoke Developed   |                                   | 25 max.<br>450 max.   | Pass<br>Pass   |



## EIFS & COATING

| Test  | Test Method                                | Criteria   | Results  |
|---|--|--|--|
| Abrasion Resistance   | ASTM D968                                  | No deleterious effects after 500 liters (528 quarts)   | Pass   |
| Accelerated Weathering  | ASTM G155 Cycle 1                          | No deleterious effects after 2000 hours  | Pass   |
| Accelerated Weathering  | ASTM G23 (G152 & 153)                      | No deleterious effects after 2000 hours  | Pass   |
| Accelerated Weathering  | ASTM G53                                   | No deleterious effects after 2000 hours (QUV)  | Pass   |
| Freeze-Thaw   | ASTM E2485 (formerly EIMA 101.01)          | No deleterious effects after 60 cycles   | Pass   |
| Freeze-Thaw   | ASTM C67 modified/ICBO AC24                | No deleterious effects after 10 cycles   | Pass   |
| Freeze-Thaw   | ASTM E2485/ICC-ES Proc. ICC ES (AC 235)*** | No deleterious effects after 10 cycles   | Pass   |
| Mildew Resistance   | ASTM D3273                                 | No growth during 28 day exposure period  | Pass   |
| Water Resistance  | ASTM D2247                                 | No deleterious effects after 14 days exposure  | Pass   |
| Impact  | ASTM D5420                                 | Gardner Impact Falling Weight  | Pass   |
| Salt Spray Resistance   | ASTM B 117                                 | No deleterious effects after 300 hours exposure  | Pass   |
| Water Penetration   | ASTM E331<br>ICC ES (AC 235)***            | No water penetration beyond the inner-most plane of the wall after 15 minutes at 137 Pa (2.86 psf) | Pass at 2.86 psf (137 Pa), 6.24 psf (299 Pa), and 12.0 psf (575 Pa) consecutively  |
| Water Vapor Transmission  | ASTM E 96 Water Method                     | Vapor permeable perm (ng/Pa.s.m <sup>2</sup> )   | EPS 5 perm-inch (114)<br>Base Coat* 12 (679)<br>Finish** 12 (674)  |
| Component-Specific Weather Protection   | IBC 1403                                   | 2-hour water test of EIFS and specific components  | Pass   |
| Drainage Efficiency   | ASTM E 2273<br>ICC ES (AC 235)***          | Minimum Drainage Efficiency of 90%   | Aggre-flex Drainage 97.8%<br>Rollershield Drainage 99.2%<br>QRW1 Drainage 97.8%  |
| * Base Coat perm value based on Master Wall F&M<br>** Finish perm value based on Master Wall Perfect Texture<br>*** AC 235 (ASTM E 2568) – Acceptance Criteria for EIFS Clad Drainage Wall Assemblies |  |  |  |
| Tensile Bond  | ASTM C297/E2134                            | Minimum 15 psi (104 kPa) – substrate or insulation failure   | Plywood/EPSA 67 psi (464) OSB/<br>EPSA 22 psi (152)<br>Brick/F&M 105 psi (728)<br>Concrete/F&M 94 psi (651)<br>Gypsum/F&M 30 psi (208) |
| Tensile Bond  | ASTM D897                                  | Bond strength before and after 2000 hours florescent UV condensation weathering.                   | Before 24.6 psi<br>After 22.7 psi  |
| Transverse Wind Load  | ASTM E330                                  | Withstand positive and negative wind loads as specified by the building code                       | Pass. Assemblies vary from 68-287 psf*   |
| * Ultimate wind loads – contact Master Wall for specific assemblies.  |  |  |  |



## IMPACT RESISTANCE (ASTM E2486/EIMA 101.86)

| Description            | OZ/SY      | IN-LB Results | Joules | EIMA Classification |
|------------------------|------------|---------------|--------|---------------------|
| Standard Mesh          | 4.5        | 50-89         | 6-10   | Medium              |
| Hi-Tech Mesh           | 6.0        | 50-89         | 6-10   | Medium              |
| Medium Mesh            | 10.4       | 50-89         | 10-17  | Medium              |
| Medium & Standard Mesh | 10.4 & 4.5 | 90-150        | 10-17  | High Impact         |
| Strong & Standard Mesh | 15.0 & 4.5 | Over 150      | >17    | Ultra High Impact   |
| Ultra & Standard Mesh  | 21.0 & 4.5 | Over 150      | >17    | Ultra High Impact   |

## CEMPLASTER FIBERSTUCCO

| Test                   | Test Method        | Criteria   | Results   |
|------------------------|--------------------|--|---|
| Finishes & Coatings    | Varies             |  | Reference EIFS & Coatings Data                      |
| Freeze-Thaw            | ICC AC11           | No deleterious effects after 10 cycles   | Pass  |
| Transverse Load        | ICC AC11/ASTM E330 | Withstand positive and negative wind loads as specified by the building code                                 | Pass. Assemblies vary from 81-124 psf*              |
| Compressive Strength   | ASTM C109          | Average load for cured sample  | 1910 psi  |
| Fire Resistance        | ASTM E119          | No effect on the fire resistance of a rated wall assembly  | See Technical Bulletin MW#168-030111 for assemblies |
| Combustibility         | ASTM E136          | Standard Test Method for Assessing Combustibility of Materials in a Vertical Tube Furnace at 750°C, Option A | Pass  |
| Accelerated Weathering | ASTM G26/G155      | No deleterious effects after 2000 hours  | Pass  |

\* Ultimate wind loads – contact Master Wall for specific assemblies.



## ROLLERSHIELD LAB (LIQUID APPLIED AIR/WATER BARRIER)

| Test                               | Test Method  | Criteria   | Results   |
|------------------------------------|--|--|---|
| Solids Content                     | Calculation  |  | Rollershield RS – 69.52% solids by weight (55.05% by volume), Rollershield TG – 73.85% solids by weight (60.12% by volume), Rollershield VB – 68.19% solids by weight (52.97% by volume)  |
| Tensile Bond                       | ASTM C297/E2134<br>ICC ES (AC 212)*                      | Minimum 15 psi (104 kPa)   | Dens Glass Gold 31 (215), Exterior Gypsum 28 (194), OSB 40 (277), Plywood 79 (563), Cement Board 70 (485), Copper 185 (1282), Galvanized steel 180 (1248), PVC 168 (1165), Aluminum 184 (1275), Coated Aluminum 203 (1407), Stainless Steel 183 (1269)  |
| Freeze-thaw                        | ASTM E2485/ICC-ES Proc.<br>ICC ES (AC 212)*              | No deleterious effects after 10 cycles   | Pass: Plywood, Cement Board, OSB, Exterior Gypsum (ASTM C79/C1396) and Dens Glass Gold (ASTM C1377) substrates  |
| Water Resistance                   | ASTM D2247<br>ICC ES (AC 212)*                           | No deleterious effects after 14 days exposure <sup>1</sup>   | Pass: Plywood Cement Board, OSB, Exterior Gypsum (ASTM C79/C1396) and Dens Glass Gold (ASTM C1377) substrates   |
| Water Vapor Transmission           | ASTM E96 Proc. B<br>ICC ES (AC 212)*                     | Vapor Permeable  | 30 perms (Rollershield RS) <sup>2</sup><br>12 perms (Rollershield TG)<br>0.07 perms desiccant (A),<br>1.35 perms water (B)(Rollershield VB)   |
| Air Permeance                      | ASTM E2178   | No ICC or ANSI/EIMA Criteria ASHRAE/IECC max. 0.004 cfm/ft <sup>2</sup> @ 1.57 psf   | 0.001 cfm/ft <sup>2</sup> @ 1.57 psf<br>0.001 L/s/m <sup>2</sup> @ 75 Pa  |
| Air Leakage                        | ASTM E2357   | No ICC or ANSI/EIMA Criteria ASHRAE/IECC max. 0.04 cfm/ft <sup>2</sup> @ 1.57 psf  | 0.0006 cfm/ft <sup>2</sup> @ 1.57 psf, 0.003 L/s/m <sup>2</sup> @ 75 Pa<br>0.04 cfm/ft <sup>2</sup> @ 6.24 psf, 0.02 L/s/m <sup>2</sup> @ 300 Pa  |
| Structural Performance             | ASTM E1233 Proc. A<br>ICC ES (AC 212)*                   | Minimum 10 positive cycles at 1/240 deflection; No cracking in field, at joints or interface with flashing                                     | Pass  |
| Racking                            | ASTM E72<br>ICC ES (AC 212)*                             | No cracking in field, at joints or interface with flashing at net deflection of 3.2 mm (1/8 inch)  | Pass  |
| Restrained Environmental           | ICC-ES Procedure<br>ICC ES (AC 212)*                     | 5 cycles; No cracking in field, at joints or interface with flashing   | Pass  |
| Water Penetration                  | ASTM E331<br>ICC ES (AC 212)*                            | No water penetration beyond the inner-most plane of the wall after 15 minutes at 137 Pa (2.86 psf)   | Pass  |
| UV Exposure                        | ICC ES Proc.<br>ICC ES (AC 212)*                         | 210 hours of exposure, rated for 6 months of exposure  | Pass  |
| Accelerated Aging                  | ICC ES Proc.<br>ICC ES (AC 212)*                         | 25 cycles of wetting and drying  | Pass  |
| Hydrostatic Pressure Test          | AATCC 127<br>ICC ES (AC 212)*                            | ICC: 549 mm (21.6 in) water column for 5 hours   | Pass  |
| Surface Burning Characteristics    | ASTM E84   | Flame Spread < 25<br>Smoke Developed < 450   | Pass  |
| Intermediate Multi-Story Fire Test | NFPA 285 (UBC 26-9)                                      | No flame spread with up to 4" insulation   | Pass  |
| Nail Sealability                   | ASTM D1970   | Standard Specification for Self-Adhering Polymer Modified Bituminous Sheet Materials Used as Steep Roofing Underlayment for Ice Dam Protection | Pass (22 mils)  |
| Heat and Smoke Release Rates       | ASTM E1354, IBC Section 1403.5, Exception 2 Requirements | Peak Heat Release Rate <150 kW/m <sup>2</sup> , Total Heat Release Rate <20 MJ/m <sup>2</sup> , Effective Heat of Combustion <18 MJ/kg         | RS: Peak Heat Release Rate = 32 kW/m <sup>2</sup> , Total Heat Release Rate = 3.6 MJ/m <sup>2</sup> , Effective Heat of Combustion = 2.5 MJ/kg, VB: Peak Heat Release Rate = 336 kW/m <sup>2</sup> , Total Heat Release Rate = 8.8 MJ/m <sup>2</sup> , Effective Heat of Combustion = 9.3 MJ/kg |

\* (AC212 – Acceptance Criteria for Water-Resistive Coatings Used as Water-Resistive Barriers over Exterior Sheathing, also referred to as ASTM E 2570

1. No cracking, checking, rusting, crazing, erosion, blistering, peeling, or delamination when viewed under 5x magnification
2. Defined as a Class III vapor retarder per the 2015 IBC and IRC





**Master Wall Inc.**  
Building a Culture of Excellence

## PRODUCT DATA

### CEMPLASTER FIBERSTUCCO

Master Wall® Cemplaster Fiberstucco is a fibered Portland cement-based bagged stucco with exceptional workability, open working time, water retention, early strength, shrinkage resistance and long-term durability.

#### FEATURES & BENEFITS

- Concentrate, mix with sand and water
- Fibered for better crack resistance
- Can be modified with Stucco Ad-Liquid for better tensile, compression and mold-resistance
- For application over lath or direct-applied to approved substrates
- Manufacturer Warranty

Application Temperature: 40°-110°F (5°-43°C)

Working Time: 1 hour

Set Time: 1-2 hours

Cure Time: 48-72 hrs at room temperature, working and drying time will vary with temperature and humidity.

#### JOB CONDITIONS

Air and substrate temperature for application of Cemplaster Fiberstucco must be 40°F (5°C) or higher and must remain 40°F (5°C) or higher for a minimum of 24 hours. Provide temporary protection to protect the wall system from damage until permanent flashings, caps and sealants are installed. Store materials in a dry place, within prescribed temperature limits and out of direct sunlight. Working and drying times are based upon normal room temperature conditions and will vary with temperature and humidity.

#### PREPARATION

Preparation - The substrate must be approved by Master Wall Inc.®, clean, dry, structurally sound and free of efflorescence, oil, grease, form release agents and curing compounds or anything that would affect bond. Painted surfaces are not acceptable and must be removed or metal lath applied. All sheathed applications must receive a minimum of 2-layers code-approved asphalt felt or equivalent.

Prepare smooth or non-absorbent solid substrates by one of the following methods or a combination; Sandblasting, chipping or acid etching, A dash-bond coat applied forcefully, Bonding compounds such as Master Wall® Stucco Ad-Liquid or BA57, Furred or self-furring metal plaster bases as per ASTM C1063.

#### Coverage per bag (sf/sm)\*

3/8" (9.5 mm) thick: 80 sf (7.4 sm)

1/2" (12.7 mm) thick: 70 sf (6.5 sm)

3/4" (19 mm) thick: 40 sf (3.7 sm)

7/8" (22 mm) thick: 34 sf (3.1 sm)

*\*All coverage is approximate and depend upon substrate, details and individual application*

#### Packaging/Shelf Life/Storage

Packaging: 80 lb. (36 kg) moisture resistant bags.

Shelf Life: 1 year

Storage: Protect from weather in a cool dry area, with low humidity.

#### Technical Data

- ASTM C109 Compressive Strength -1900 psi
- ASTM E330 Wind-rated Assemblies -81-108 psf Ultimate Load
- ASTM G155 Accelerated Weathering - Pass
- ICC-ES AC11 Durability Testing - Pass
- ASTM E136 - Noncombustible
- ASTM C926 compliant following standard practices

Recognized in INTERTEK CCRR-0215

## APPLICATION PROCEDURE

Mixing Instructions: Each bag of Cemplaster Fiberstucco is mixed with 200 lbs (90.7 kg) of sand aggregate (ASTM C897 or ASTM C144) and clean, potable water (200 lbs is roughly 2.5 cubic feet (0.07 cubic meters) of clean, damp-loose sand or 2-3/4 Master Wall® pails, filled). Using a clean mixer, first add 1/2 to 2/3 the water required, 1/2 the sand, 1 bag Cemplaster Fiberstucco, then the rest of the sand and water to achieve the desired workability. Mix materials for 3 to 5 minutes after all materials are in the mixer. Total water content can vary between 4 to 6.5 gallons (15-24.5L). Stucco Ad-Liquid may also be used instead of an equal amount of water (up to 5 gallons, 18.9L). See system data sheet for specific levels required for increased warranties.

Tempering—The mixed stucco can be re-tempered one time within 1 hour. Material older than 1-1/2 hours should be discarded.

### Application

Direct Applied to Masonry: Dampen absorptive masonry just before application with water or Master Wall® BA57 Bonding Agent.

Scratch Coat: apply Cemplaster Fiberstucco with sufficient pressure to key into and embed the metal lath (if used). Apply sufficient material, approximately half the Cemplaster Fiberstucco ground thickness to cover the metal lath and to permit scoring the surface. Score the Cemplaster Fiberstucco horizontally upon completion of each panel in preparation for brown coat if a “double back” application of a wet scratch and brown coat isn’t being used.

Brown Coat: as soon as the scratch coat is firm enough to receive the brown coat without damage, apply the brown coat with sufficient pressure to ensure intimate contact with the first coat to an approximate thickness as needed to bring the Cemplaster Fiberstucco to a uniform thickness that matches the grounds of the accessories. Use a rod or straight edge to bring the surface to a true, even plane. Fill depressions in plane with Cemplaster Fiberstucco.

After the Cemplaster Fiberstucco has become slightly firm float the surface lightly with a Darby or wood float to densify the surface and to provide a smooth, even surface.

## CLEAN UP

Tools and equipment can be cleaned with soapy water while the Cemplaster Fiberstucco mixture is still wet.

## Curing Recommendations

Cure following ASTM C926 guidelines or other method acceptable to the design professional for 48-72 hours. Mixes with Master Wall® Stucco Ad Liquid do not need moist curing.

Allow to cure until clean, dry and hard before finishing:

- Typically 7-14 days if no Master Wall® Stucco Ad Liquid is used.
- After 72 hours if Master Wall® Stucco Ad Liquid is used provided the Cemplaster Fiberstucco is clean, dry and hard.
- After 24 hours if using a leveling base coat (LBC).

**Hazard:** This chemical is not considered hazardous according to the OSHA Hazard Communication Standard 2012 (29 CFR 1910.1200).

**WARNING:** Products containing crystalline silica (airborne particles of respirable size) are known to the State of California to cause cancer. For more information go to [www.p65Warnings.ca.gov](http://www.p65Warnings.ca.gov).

**VOC:** Less than 50 g/L.

## Approved Substrates

Self-furring Metal Lath

Concrete

Brick

Masonry

Others approved in writing

Information contained in this product data sheet conforms to the standard detail recommendations and specifications for the installation of Master Wall Inc.® products and is presented in good faith. Master Wall Inc.® assumes no liability, expressed or implied as to the architecture, engineering, or workmanship of any project. This information may be concurrent with, or superseded by other applicable documents, such as specifications and details. Contact Master Wall Inc.® for the most current product information. ©2022 Master Wall Inc.®



**Master Wall Inc.**  
Building a Culture of Excellence

## PRODUCT DATA

### READY CEMPLASTER FIBERSTUCCO

Master Wall® Ready Cemplaster Fiberstucco is a fibered Portland cement-based bagged stucco with exceptional workability, open working time, water retention, early strength, shrinkage resistance and long-term durability.

#### FEATURES & BENEFITS

- Ready to use, mix with water
- Great for jobsites with limited space for on-site storage
- Fibered for better crack resistance
- Can be modified with Stucco Ad-Liquid for better tensile, compression and mold-resistance
- For application over lath or direct-applied to approved substrates
- Manufacturer Warranty

Application Temperature: 40°-110°F (5°-43°C)

Working Time: 1 hour

Set Time: 1-2 hours

Cure Time: 48-72 hrs at room temperature, working and drying time will vary with temperature and humidity.

#### JOB CONDITIONS

Air and substrate temperature for application of Ready Cemplaster Fiberstucco must be 40°F (5°C) or higher and must remain 40°F (5°C) or higher for a minimum of 24 hours. Provide temporary protection to protect the wall system from damage until permanent flashings, caps and sealants are installed. Store materials in a dry place, within prescribed temperature limits and out of direct sunlight. Working and drying times are based upon normal room temperature conditions and will vary with temperature and humidity.

#### PREPARATION

The substrate must be approved by Master Wall Inc.®, clean, dry, structurally sound and free of efflorescence, oil, grease, form release agents and curing compounds or anything that would affect bond. Painted surfaces are not acceptable and must be removed or metal lath applied. All sheathed applications must receive a minimum of 2-layers code-approved asphalt felt or equivalent.

Prepare smooth or non-absorbent solid substrates by one of the following methods or a combination; Sandblasting, chipping or acid etching, A dash-bond coat applied forcefully, Bonding compounds such as Master Wall® Stucco Ad-Liquid or BA57, Furred or self-furring metal plaster bases as per ASTM C1063.

#### Coverage perbag (sf/sm)\*

3/8" (9.5 mm) thick: 22 sf (2 sm)

1/2" (12.7 mm) thick: 20 sf (1.8 sm)

3/4" (19 mm) thick: 11 sf (1 sm)

7/8" (22 mm) thick: 9.4 sf (0.9 sm)

*\*All coverage is approximate and depend upon substrate, details and individual application*

#### Packaging/Shelf Life/Storage

Packaging: 80 lb. (36 kg) moisture resistant bags.

Shelf Life: 6-12 months

Storage: Protect from weather in a cool dry area, with low humidity.

#### Technical Data

- ASTM C109 Compressive Strength 1900 psi
- ASTM E330 Wind-rated Assemblies 81-108 psf Ultimate Load
- ASTM G155 Accelerated Weathering - Pass
- ICC-ES AC11 Durability Testing - Pass
- ASTM E136 - Noncombustible
- ASTM C926 compliant following standard practices

Recognized in IAPMO UES ER-0381

## APPLICATION PROCEDURE

**Mixing** - Each bag of Ready Cemplaster Fiberstucco is mixed clean, potable water. Using a clean mixer, first add 1/2 to 2/3 the water required, 1 bag Ready Cemplaster Fiberstucco, then the rest of the water to achieve the desired workability. Mix materials for 3 to 5 minutes after all materials are in the mixer. Total water content can vary between 1 to 1.5 gallons (3.8-5.7L). Stucco Ad-Liquid may also be used instead of an equal amount of water. See system data sheet for specific levels required for increased warranties.

**Tempering**—The mixed stucco can be re-tempered one time within 1 hour. Material older than 1-1/2 hours should be discarded.

### Application

**Direct Applied to Masonry:** Dampen absorptive masonry just before application with water or Master Wall® BA57 Bonding Agent.

**Scratch Coat:** apply Ready Cemplaster Fiberstucco with sufficient pressure to key into and embed the metal lath (if used). Apply sufficient material, approximately half the Ready Cemplaster Fiberstucco ground thickness to cover the metal lath and to permit scoring the surface. Score the Ready Cemplaster Fiberstucco horizontally upon completion of each panel in preparation for brown coat if a “double back” application of a wet scratch and brown coat isn’t being used.

**Brown Coat:** as soon as the scratch coat is firm enough to receive the brown coat without damage, apply the brown coat with sufficient pressure to ensure intimate contact with the first coat to an approximate thickness as needed to bring the Ready Cemplaster Fiberstucco to a uniform thickness that matches the grounds of the accessories. Use a rod or straight edge to bring the surface to a true, even plane. Fill depressions in plane with Ready Cemplaster Fiberstucco.

After the Ready Cemplaster Fiberstucco has become slightly firm float the surface lightly with a Darby or wood float to densify the surface and to provide a smooth, even surface.

## CLEAN UP

Tools and equipment can be cleaned with soapy water while the Ready Cemplaster Fiberstucco mixture is still wet.

## Curing Recommendations

Cure following ASTM C926 guidelines or other method acceptable to the design professional for 48-72 hours. Mixes with Master Wall® Stucco Ad Liquid do not need moist curing.

Allow to cure until clean, dry and hard before finishing:

- Typically 7-14 days if no Master Wall® Stucco Ad Liquid is used.
- After 72 hours if Master Wall® Stucco Ad Liquid is used provided the Cemplaster Fiberstucco is clean, dry and hard.
- After 24 hours if using a leveling base coat (LBC).

**Hazard:** This chemical is not considered hazardous according to the OSHA Hazard Communication Standard 2012 (29 CFR 1910.1200).

**WARNING:** Products containing crystalline silica (airborne particles of respirable size) are known to the State of California to cause cancer. For more information go to [www.p65Warnings.ca.gov](http://www.p65Warnings.ca.gov).

VOC: Less than 50 g/L.

### Approved Substrates

Self-furring Metal Lath  
Concrete  
Brick  
Masonry  
Others approved in writing

Information contained in this product data sheet conforms to the standard detail recommendations and specifications for the installation of Master Wall Inc.® products and is presented in good faith. Master Wall Inc.® assumes no liability, expressed or implied as to the architecture, engineering, or workmanship of any project. This information may be concurrent with, or superseded by other applicable documents, such as specifications and details. Contact Master Wall Inc.® for the most current product information.  
©2022 Master Wall Inc.®



**Master Wall Inc.®**  
Building a Culture of Excellence

## PRODUCT DATA

### CEMPLASTER FIBERSTUCCO CO-BRAND PRODUCTS

As part of our Cemplaster Fiberstucco Systems, Master Wall Inc.® allows select products as part of our warranty program. Warranties are available up to 20-years depending upon product selections and combinations.

#### FEATURES & BENEFITS

- Warranties up to 20-years through Master Wall Inc.®
- Preblended and Concentrate options
- Locally and regionally available for LEED compliance
- Engineered for consistency

Warranties for all projects will be provided by Master Wall® following our regular process. For coverage the following needs to be completed:

- Materials must be purchased through an authorized Master Wall® distributor.
- A warranty must be requested for the project, including all QUIKRETE® requirements noted on the request form.
- The applicator must be certified and current.
- To request a warranty go to the Tech/Support page at [masterwall.com](http://masterwall.com) and fill out the form.

**See our Systems page for Cemplaster Fiberstucco Warranties**

Information contained in this product data sheet conforms to the standard detail recommendations and specifications for the installation of Master Wall Inc.® products and is presented in good faith. Master Wall Inc.® assumes no liability, expressed or implied as to the architecture, engineering, or workmanship of any project. This information may be concurrent with, or superseded by other applicable documents, such as specifications and details. Contact Master Wall Inc.® for the most current product information. ©2021 Master Wall Inc.®



**Master Wall Inc.®**  
Building a Culture of Excellence

#### CO-BRAND PRODUCTS

QUIKRETE® One Coat Fiberglass Reinforced Stucco (FRS) (No. 1200 Sanded, No. 1216-Concentrated)

QUIKRETE® Base Coat Stucco Scratch & Brown (No. 1139) & Base Coat Stucco - Pump Grade (No. 1139-86)\*

QUIKRETE® Base Coat Stucco with Water-Stop (No. 1139-89)\*

QUIKRETE® Base Coat Stucco - Pump Grade (No. 1139-86)\*

FRS Lightweight Stucco (No. 1201-56)\*

SPEC MIX® SCRATCH AND BROWN FIBER REINFORCED STUCCO(SU-04)\*

SPEC MIX® Scratch and Brown Preblended Stucco\*

SPEC MIX® Fiber Base Coat (FBC)

WESTERN 1-Kote Gray Concentrate

WESTERN 1-Kote Gray Premium Concentrate

WESTERN 1-Kote Premium Sanded Gray

WESTERN 1-Kote Sanded Gray

\*Apply these stucco products in accordance with ASTM C926 and Master Wall® requirements.



**Master Wall Inc.®**  
Building a Culture of Excellence

## PRODUCT DATA

### PRIMECOAT PRIMER

High quality exterior acrylic primer that helps solidify and protect the surface. Integrally colored Primecoat Primer helps make finishes brighter and deeper, reduces efflorescence and extends finish coverage rates. Suitable for priming Master Wall® base coats, new stucco, masonry and concrete that has a pH of 13 or less.

#### FEATURES & BENEFITS

- Tintable sealer/primer with good hiding power
- Hot prime capable for pH 13 or less
- Reduces finish absorption for improved aesthetics and reduced finish color variations
- Recommended for extreme color changes, under very dark, vivid or bright topcoats or when top tier finishing is specified
- Extends finish coverage, required when spraying Superior Finishes and some specialty finishes
- 100% Acrylic Polymers for durability
- Water-based - easy clean up with water

Application Temperature: 40°-110°F (5°-43°C)

Dry to touch: 1 hour

Recoat Time: 2 hours

Dry Time: 12 hours at room temperature, working and drying time will vary with temperature and humidity.

#### JOB CONDITIONS

Air and substrate temperature for application of Primecoat must be 40°F (5°C) or higher and must remain 40°F (5°C) or higher for a minimum of 24 hours. Provide temporary protection to protect the wall system from damage until permanent flashings, caps and sealants are installed. Store materials within prescribed temperature limits and out of direct sunlight. Working and drying times are based upon normal room temperature conditions and will vary with temperature and humidity.

#### PREPARATION

The substrate must be approved by Master Wall Inc.®, clean, dry, structurally sound and free of efflorescence, oil, grease, form release agents and curing compounds or anything that would affect bond. Concrete and masonry should be cured a minimum of 28 days, stucco cured a minimum of 7-14 days or surfaces verified to have a pH less than 13.

#### Coverage per pail (sf/sm)\*

1000-1200 sf/pail (93-112 sm)\*

*\*All coverage is approximate and depend upon substrate, details and individual application*

#### Packaging/Shelf Life/Storage

Packaging: 5 gallon (19L) pail Pail

Shelf Life: 2 years

Storage: Protect from extreme heat - 90°F (32°C), freezing and direct sunlight.

#### Technical Data

Water Vapor Transmission (perms), ASTM E96 Vapor Permeable

#### Substrate Recommendations

Concrete – If preparing for a textured or specialty finish, all projections must be removed and any voids filled with a Master Wall® base coat as needed to provide an appropriate surface.

Masonry – If preparing for a textured or specialty finish, skim coat with a Master Wall® base coat to achieve a smooth level surface. If joints are not struck flush, multiple coats may be required. Contact Master Wall for more information.

Stucco – If additives were used in the stucco, it is recommended that a test patch be made to evaluate bond strength of the Primecoat to the stucco.

Master Wall® Base Coats or Finishes, Previously Painted Surfaces, Cement Composition Siding

Install/Apply and prepare according to published guidelines. Surfaces should be clean, dry, cured and ready to receive coatings.

## APPLICATION PROCEDURE

*Mixing* - Thoroughly stir Primecoat into a homogeneous consistency. Small amounts of clean, potable water may be added to obtain a workable consistency. Do not over mix. Do not exceed 24 ounces (0.7L) of water per pail. Do not add accelerators or retarders to Primecoat.

*Application* - Primecoat can be applied by brush, roller, or airless spray equipment. When using a roller, a maximum 3/4" (19 mm) nap is recommended. Apply Primecoat in an even, continuous coat of about 3 mils, maintaining a wet edge.

*Airless Spray Application* - Pressure 2000 p.s.i., Tip .015- to .019 inch. Spray in a consistent manner or backroll after spraying for a consistent application.

*Limitations* - Primecoat is not intended for use as the final finish coat over Master Wall base coats or other approved substrates.

## FOR PROFESSIONAL RESULTS

Apply coatings away from direct sunlight. Cold joints or color variations can occur if the finish dries too quickly. Under certain conditions dark colors may show efflorescence on the surface during the cure process.

Surfaces exposed to the weather must be sloped (6:12 minimum). Use of dark colors in high temperature climates can affect the performance of the system, especially EIFS and areas may need to be limited.

## CLEAN UP

Tools and equipment can be cleaned with soapy water when Primecoat is wet.

**Hazard:** This chemical is not considered hazardous according to the OSHA Hazard Communication Standard 2012 (29 CFR 1910.1200).

**VOC:** Less than 50 g/L.

### Approved Substrates

Master Wall® Base Coats  
Stucco  
Brick  
Masonry  
Concrete  
Interior Drywall  
Previously painted surfaces with bond test  
Others approved in writing

**Warning:** KEEP CONTAINER CLOSED WHEN NOT IN USE. KEEP OUT OF THE REACH OF CHILDREN. NOT FOR INTERNAL CONSUMPTION. FOR INDUSTRIAL USE ONLY.

Consult the Safety Data Sheet (SDS) in the Products section at [masterwall.com](http://masterwall.com) for further health and safety information.

### LIMITED WARRANTY

This product is subject to a written limited material or system warranty. Obtain a warranty from the Tech Support tab of our website. Refer to Specifications for more complete information on proper use and handling of this product.

Information contained in this product data sheet conforms to the standard detail recommendations and specifications for the installation of Master Wall Inc.® products and is presented in good faith. Master Wall Inc.® assumes no liability, expressed or implied as to the architecture, engineering, or workmanship of any project. This information may be concurrent with, or superseded by other applicable documents, such as specifications and details. Contact Master Wall Inc.® for the most current product information. ©2022 Master Wall Inc.®



**Master Wall Inc.®**  
Building a Culture of Excellence

## PRODUCT DATA

### SUPERIOR FINISHES

To finish strong you need a Superior Finish. Master Wall® finishes are crafted with one of the highest 100% acrylic polymer contents in our industry. This translates to extra durability, lower life-cycle maintenance and a longer lasting finish.

### FEATURES & BENEFITS

- 100% Acrylic Polymers for durability
- Dirt Pickup Resistant (DPR) Polymer Formulation
- Quartz or Marble aggregate available
- 64 Standard Colors
- Custom color matching available
- DuroTone colorfast pigments, Excel mildew enhancement, Silicone Coat additive available
- Vapor Permeable - resists blistering and allows trapped water vapors to pass
- Low VOC—Suitable for Interior Use
- Water Based - easy clean up with water

Application Temperature: 40°-110°F (5°-43°C)

Working Time: 1/4 hr

Set Time: 8-12 hrs

Dry Time: 48-72 hrs at room temperature, working and drying time will vary with temperature and humidity.

### JOB CONDITIONS

Air and substrate temperature for application of Superior Finishes must be 40°F (5°C) or higher and must remain 40°F (5°C) or higher for a minimum of 24 hours. Provide temporary protection to protect the wall system from damage until permanent flashings, caps and sealants are installed. Store materials within prescribed temperature limits and out of direct sunlight. High temperatures will reduce working times, Low temperatures and/or high humidity and pigment loading will extend working, set and dry times.

### PREPARATION

The substrate must be approved by Master Wall Inc.®, clean, dry, structurally sound and free of efflorescence, oil, grease, form release agents and curing compounds or anything that would affect bond. Painted surfaces are not acceptable and must be removed. Concrete and surfaces should cure for a minimum of 28 days. Stucco should be cured until clean, dry and hard—typically 14 days with a pH of 10 or less (13 or less if Primecoat Primer is used).

Interior drywall should be finished and made ready for paint. Prime surfaces with Primecoat/Sanded Primecoat primer prior to finishing.

### Coverage per pail (sf/sm)\*

- Perfect Swirl 2.0, 120-150 (11-14)
- Fine Sand 1.0, 160-170 (15-15.8)
- Medium Sand 1.5, 130-150 (12-14)
- Versatex 0.5, Varies with Texture

*\*All coverage is approximate and depend upon substrate, details and individual application*

### Packaging/Shelf Life/Storage Packaging:

- 5 gallon (19L) pail Pail

Shelf Life: 2 years

Storage: Protect from extreme heat (90°F, 32°C), freezing and direct sunlight.

### Technical Data

ASTM B117 Salt Spray Resistance - Pass ASTM

C67 Freeze/Thaw - Pass

ASTM C297 Tensile Bond - 30 psi minimum

ASTM D968 Abrasion Resistance - Pass 500L

ASTM D2247/E2570 Water Resistance - Pass

ASTM D3273 Mildew Resistance - Pass 28 Days

ASTM E84 Surface Burning - Pass, FS=0, SD=0

ASTM E 96 Vapor Permeability - Pass, 12 perms, vapor open

ASTM E108 Flame Propagation - Pass

ASTM E2485/2570 (formerly EIMA 101.01)

Impact Resistance - Pass

ASTM G23/G154/G155 Accelerated Weathering - Pass 2000 Hours

ASTM G53 Accelerated Weathering - Pass 2000 Hours

## APPLICATION PROCEDURE

Base Coats - Must be flat, dry hard, and free of efflorescence. Master Wall® base coats must cure a minimum of 12 hours before application of Superior Finish. Substrates of brick, masonry or concrete should be leveled smooth using either Master Wall® base coats or stucco.

Mixing - Thoroughly stir Superior Finish using a heavy duty 1/2" drill at 400 - 500 rpm and a heavy duty mixing paddle. Small amounts of clean, potable water may be added to obtain a workable consistency. To avoid color variations, add the same amount of water to each pail. Do not exceed 24 ounces (0.7L) of water per pail of finish.

Application - Apply a uniform thickness (about 1/16", 1.6 mm) of Superior Finish to the substrate using a stainless steel trowel. Spread evenly and then scrape the finish coat down to a thickness no greater than the largest aggregate in the material. Immediately float the finish coat using a plastic float to the desired texture. Always maintain a wet edge to achieve uniformity of texture and color. Allow the finish to fully dry and set before exposure to inclement weather.

## FOR PROFESSIONAL RESULTS

Apply finish coats away from direct sunlight. Cold joints or color variations can occur if the finish dries too quickly. Priming stucco surfaces with Primecoat/Sanded Primecoat evens out finish absorption and should be strongly considered and specified for dark colored finishes, especially those using Ultra Deep Base (UDB) tint base and over stucco to avoid efflorescence blush. Under certain conditions dark colors may show efflorescence on the surface during the cure process.

Surfaces exposed to the weather must be sloped (6:12 minimum). Use of dark colors in high temperature climates can affect the performance of the system, especially EIFS and areas may need to be limited.

Deep, intense colors should be specified with DuroTone pigments to maintain colorfastness longer. Verify specialty colors with your Master Wall® Distributor. Finishes are intended for the approved substrates listed above and should not be applied directly to gypsum board or insulation board products.

## CLEAN UP

Tools and equipment can be cleaned with soapy water while the Superior Finish is still wet.

**Hazard:** This chemical is not considered hazardous according to the OSHA Hazard Communication Standard 2012 (29 CFR 1910.1200).




**VOC:** Less than 50 g/L.

See Superior Finishes for other technical properties

### Approved Substrates

Master Wall® Base Coats  
Cemplaster Fiberstucco, One Coat Stucco (OCS), Primecoat Primer surfaces, ASTM C926 Stucco

Prepared & Base Coated Surfaces of:  
Brick, Concrete, Masonry  
Others approved in writing

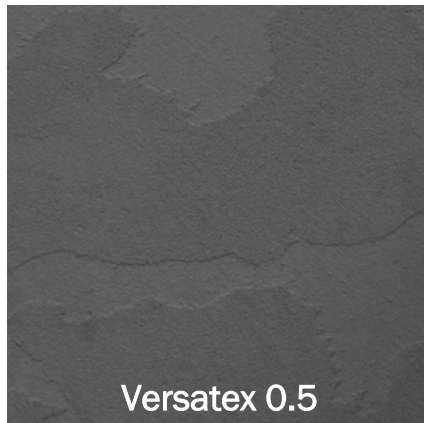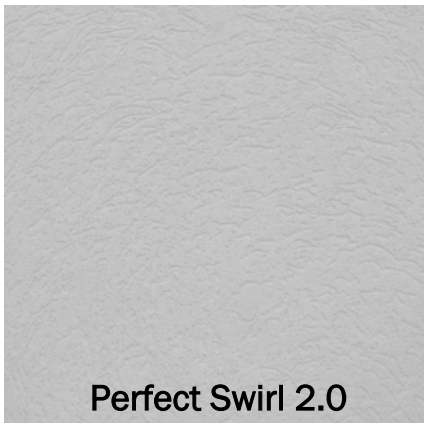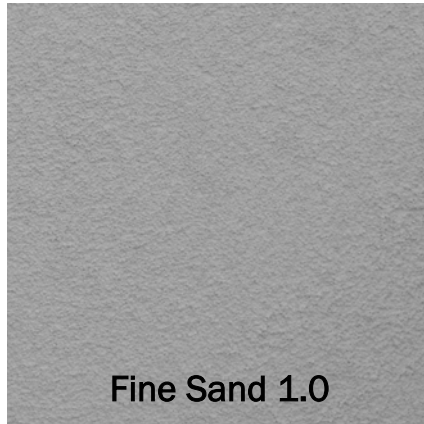

Information contained in this product data sheet conforms to the standard detail recommendations and specifications for the installation of Master Wall Inc.® products and is presented in good faith. Master Wall Inc.® assumes no liability, expressed or implied as to the architecture, engineering, or workmanship of any project. This information may be concurrent with, or superseded by other applicable documents, such as specifications and details. Contact Master Wall Inc.® for the most current product information. ©2022 Master Wall Inc.®



**Health & Safety**

**WARNING!**

Causes eye and skin irritation.  
 Precautionary Statement  
 Wash hands thoroughly after handling. Wear protective gloves/protective clothing/eye protection/face protection.

**FIRST AID MEASURES**

**Eye Contact:** Immediately flush eyes with plenty of water for at least 15 to 20 minutes. Ensure adequate flushing of the eyes by separating the eyelids with fingers. Get immediate medical attention.

**Skin Contact:** Immediately wash skin with plenty of soap and water for 15 to 20 minutes, while removing contaminated clothing and shoes. Get medical attention if irritation develops or persists.

**Inhalation:** If inhaled, remove to fresh air. If not breathing, give artificial respiration or give oxygen by trained personnel. Seek immediate medical attention.

**Ingestion:** If swallowed, do NOT induce vomiting. Call a physician or poison control center immediately. Never give anything by mouth to an unconscious person.

**Store locked up.** Dispose of contents/container in accordance with Local, State, Federal and Provincial regulation.

**Spills:** Collect with suitable absorbent material such as cotton rags.

**Disposal:** Dispose of in accordance with local, state or federal regulations.

**Warning:** KEEP CONTAINER CLOSED WHEN NOT IN USE. KEEP OUT OF THE REACH OF CHILDREN. NOT FOR INTERNAL CONSUMPTION. FOR INDUSTRIAL USE ONLY.

Consult the Safety Data Sheet (SDS) in the Products section at masterwall.com for further health and safety information.

**LIMITED WARRANTY**

This product is subject to a written limited material or system warranty. Obtain a warranty from the Tech Support tab of our website. Refer to Specifications for more complete information on proper use and handling of this product.