



Bulltec Stucco Mesh

Use with
Cemplaster Fiberstucco
One Coat Stucco
Traditional Stucco

VOC: 0
Shipping Locations:
30058 • 77474 • 84651

Mesh Weight:
2.0 oz/sy (67 g/sm)

Tensile Strength:
68 lbf./in. minimum

Roll Size:
38" x 150'
(96.5cm x 45.7m)

Approximate Coverage per Roll:
475 sf (44.1 sm)


*Allow about 10% waste for lapping mesh

**Packaging: 4 rolls per box
25 boxes/pallet (100 rolls)**

Master Wall® Bulltec Stucco Mesh is the solution to reduce stucco cracking and improve the performance of any stucco system. Bulltec is an alkali resistant lightweight mesh with an open weave of MW fabric that quickly and easily embeds into either wet stucco products or Master Wall® base coats.

Application Methods

- **Embedded into wet brown coats of Master Wall® Cemplaster Fiberstucco, One Coat Stucco or traditional stucco mixes**
- **As part of a leveling base coat application for a super smooth base, embedded into Master Wall® or Accent® Base Coats.**

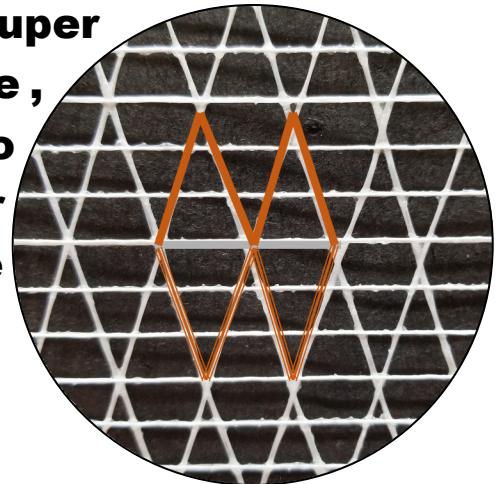

**5-Year
Limited
Warranty!**

Also extends Cemplaster Fiberstucco System Warranties by One Year



Master Wall Inc.®
Building a Culture of Excellence

masterwall.com

PO Box 397 • Fortson • GA • 31808 • 800-755-0825 • Tech: 800-760-2861



Bulltec Stucco Mesh

Application Procedure

Job Conditions - Air and substrate temperature for embedment of the Reinforcing Mesh must be 40°F (5°C) or higher and must remain 40°F (5°C) or higher for a minimum of 24 hours. Provide temporary protection at all times until the wall system, including flashings, caps, and sealants, is completed to provide protection from climatic conditions and other potential damage.

Application

Into Wet Stucco Bases: Immediately embed the Bulltec Stucco Mesh into the wet stucco brown coat and smooth from the center to the edge to avoid wrinkles. Lap the mesh a minimum of 2-1/2" (63.5 mm) on all sides. The color of the mesh shall not be visible but a slight mesh pattern may be visible.

Into Master Wall® Base Coats: Over the dried stucco, apply the base coat over the entire surface of the stucco in a thickness of approximately 1/16" (1.6 mm). Immediately embed the Bulltec Stucco Mesh into the wet base coat and smooth from the center to the edge to avoid wrinkles. Lap the mesh a minimum of 2-1/2" (63.5 mm) on all sides. The color of the mesh shall not be visible but a slight mesh pattern may be visible.

Allow the stucco or base coats to cure prior to finishing.

Bulltec Mesh is not approved for EIFS or foam trim applications. Use Standard Mesh for foam trim.

Master Wall Inc. warrants Bulltec Stucco Mesh for 5 years from the date of installation. Master Wall Inc.'s exclusive liability under this warranty is to supply replacement materials less depreciation, if it is shown that the materials supplied by Master Wall Inc., were defective when installed by the Master Wall Inc. certified applicator. Remedies shall be solely determined by Master Wall Inc. and no other warranties are expressed or implied. For a valid warranty, the system and products must be installed in accordance with Master Wall Inc.'s written recommendations, specifications, details, bulletins and other project-specific written recommendations. Master Wall Inc. must be notified in writing within 30 business days of the original discovery of the defect.

Master Wall Inc., is not responsible for structural conditions, design conditions beyond those noted in our literature, architecture, engineering or workmanship of any project. This warranty does not cover failures or defects which are due to the failure on any building component, materials not manufactured or sold by Master Wall Inc. This warranty does not cover failures or defects resulting from improper installation of the products or workmanship, improper storage, abuse, vandalism, damage from accidental causes or negligence by any person, thermal movement, structural movement, structural failure, acts of God, engineering or design deficiencies, or defective or insufficient caulking.

Abuse, misuse, excessive weather or environmental conditions beyond what the products or systems have been tested, designed or approved for is expressly limited. Certain colors with organic pigments are less fade-resistant than others. The building, system and products must be properly maintained in accordance with Master Wall Inc., documents, local environmental conditions and good building practices. In no case is Master Wall Inc. responsible for incidental and consequential damages.

This warranty becomes effective only when all bills for the components of the system have been paid.

Except as stated, Master Wall, Inc., expressly disclaims any warranty of merchantability or fitness for a particular purpose. The above remedies are to be deemed exclusive.

Information contained in this product data sheet conforms to the standard detail recommendations and specifications for the installation of Master Wall Inc.® products and is presented in good faith. Master Wall Inc.® assumes no liability, expressed or implied as to the architecture, engineering, or workmanship of any project. This information may be concurrent with, or superseded by other applicable documents, such as specifications and details. Contact Master Wall Inc.® for the most current product information. ©2018 Master Wall Inc.®



Bulltec Stucco Mesh Embedded in Wet Stucco



Bulltec Stucco Mesh Embedded in Master Wall® Base Coat

