



Superior Stone

Fine Granite Look Finish

Systems

Master Wall® EIFS
Cem plaster Fiberstucco
ICF Coatings
Soffit System
Stucco Cement Board Coatings
Uninsulated Finishes

VOC: <1% by Weight

VOC: 1.13 g/l

Manufacture Locations:

30058 • 77474 • 84651

**Packaging: 5 gallon (19L)
pail**

Pail Weight:


65 lbs (29.5 kg)

Shelf Life: 2 years

Coverage (estimated)

90-110 sf (8.5-10 sm)

Superior Stone Finishes uses integrally colored beads to create the look of fine granite. Applied over a tinted Primecoat Primer, Superior Stone is easily applied for an upscale look on building interiors or exteriors at a relatively low cost.

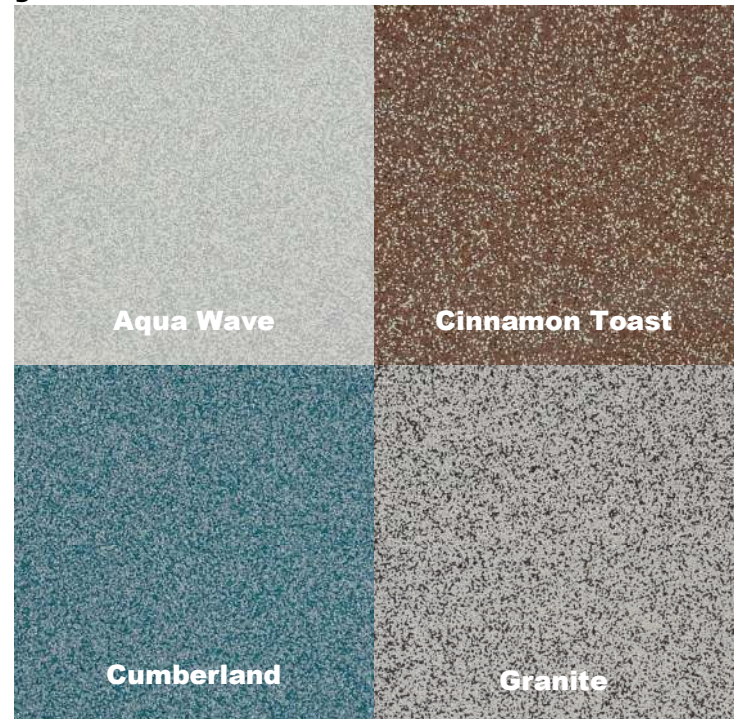

Aqua Wave

Cinnamon Toast

Cumberland

Granite



Providence

Seafoam

Sierra

Stone Mountain

More Information



masterwall.com



Master Wall Inc.®
Building a Culture of Excellence

masterwall.com

PO Box 397 • Fortson • GA • 31808 • 800-755-0825 • Tech: 800-760-2861



Superior Stone

Temp: 50°-110°F (10°-43°C) • Working Time: 1 hr • Dry Time: 72 hrs
at room temperature, working and drying time will vary with temperature and humidity

Application Procedure

General—Air and substrate temperature for application of *Superior Stone* must be 50°F (10°C) or higher and must remain 50°F (10°C) or higher for a minimum of 24 hours. Working and drying times are based upon normal room temperature conditions and will vary with temperature and humidity. Dry time will vary, typically 8-12 hours to firm set and 48-72 hours to fully dry at room temperature.

Preparation - The substrate must be approved by Master Wall Inc., clean, dry, structurally sound and free of efflorescence, oil, grease, form release agents and curing compounds or anything that would affect bond. Painted surfaces are not acceptable and must be removed. Concrete and surfaces should cure for a minimum of 28 days. Stucco should be cured until clean, dry and hard—typically 14 days.

Interior drywall should be finished and made ready for paint. Prime surfaces with *Sanded Primecoat* primer prior to finishing with *Superior Stone*.

Base Coats - Must be flat, dry hard, and free of efflorescence. Master Wall base coats must cure a minimum of 12 hours before application of *Superior Finish*. Substrates of brick, masonry or concrete should be leveled smooth using either Master Wall base coats or stucco.

Mixing—Thoroughly stir the *Superior Stone Finish* using a heavy duty 1/2" (12.7 mm) drill at 400-500 rpm and a paddle similar to a Wind-lock B-MTW mixer. Small amounts of clean, potable water may be added to obtain a workable consistency. To avoid texture or coverage variations, add the same amount of water to each pail. Don't exceed 24 ounces (0.7L) of water per pail.

Application—Prime the surface with Master Wall *Primecoat* or *Sanded Primecoat* tinted to match the predominate color of stone in the selected *Superior Stone* color. Allow *Primecoat* to dry a minimum of 12 hours prior to finish coat application.

Superior Stone Finish is typically applied in one or two coats, trowel applied with a stainless steel trowel. Apply the coating to the thickness of the aggregate taking care to avoid trowel marks in the finish surface. Let first coat dry prior to beginning a second coat. Smooth to match approved sample.

Contact Master Wall regarding spray application.

Clean Up—Tools and equipment can be cleaned with soapy water while the finish coat is still wet.

For Professional Results

Apply finish coats away from direct sunlight.

Surfaces exposed to the weather must be sloped (6:12 minimum).

Finishes are intended for the approved substrates listed above and should not be applied directly to gypsum board or insulation board products except as noted above.

Approved Substrates

Interior Drywall
Master Wall Base Coats
Others approved in writing

Information contained in this product data sheet conforms to the standard detail recommendations and specifications for the installation of Master Wall Inc.® products and is presented in good faith. Master Wall Inc.® assumes no liability, expressed or implied as to the architecture, engineering, or workmanship of any project. This information may be concurrent with, or superseded by other applicable documents, such as specifications and details. Contact Master Wall Inc.® for the most current product information. ©2017 Master Wall Inc.®



PO Box 397 • Fortson • GA • 31808 • 800-755-0825 • Tech: 800-760-2861