



SUPERIORSHIELD SMP SEALANT

SuperiorShield SMP Sealant Cross-Reference Sheet

Key Features


ADVANTAGES

- Solvent free & Isocyanate free
- Bonds to most common building materials without priming
- Easy to gun and tool in all climates
- Bonds and cures in wet weather and on damp substrates
- No shrinkage. No staining. Non-yellowing

APPLICABLE STANDARDS

- ASTM C920, TYPE S, GRADE NS, CLASS 50, USE NT, A, O
- CARB and SCAQMD Compliant
- Meets VOC Requirements for OTC Regulation
- AAMA Compliant 713-10, 808.3-10
- US. Federal Specification TT-S-00230C, CAN/CGSB 19.13-M87
- Meets AAMA 714-19 Flashing Standard
- ASTM E-84 - Class A Rated

Manufacturer	Master Wall®	Master Builders	Sika	Tremco	Pecora	OSI
Urethane-1 Component	SuperiorShield SMP	Masterseal NP1	Sikaflex 1A Sikaflex 15 LM	Vulkem 116	Dynatrol 1 XL	N/A
Hybrid	SuperiorShield SMP	Masterseal NP 150	Sika Hyflex 150	Dymonic 100	Dynatrol 1 XL	Quad Max

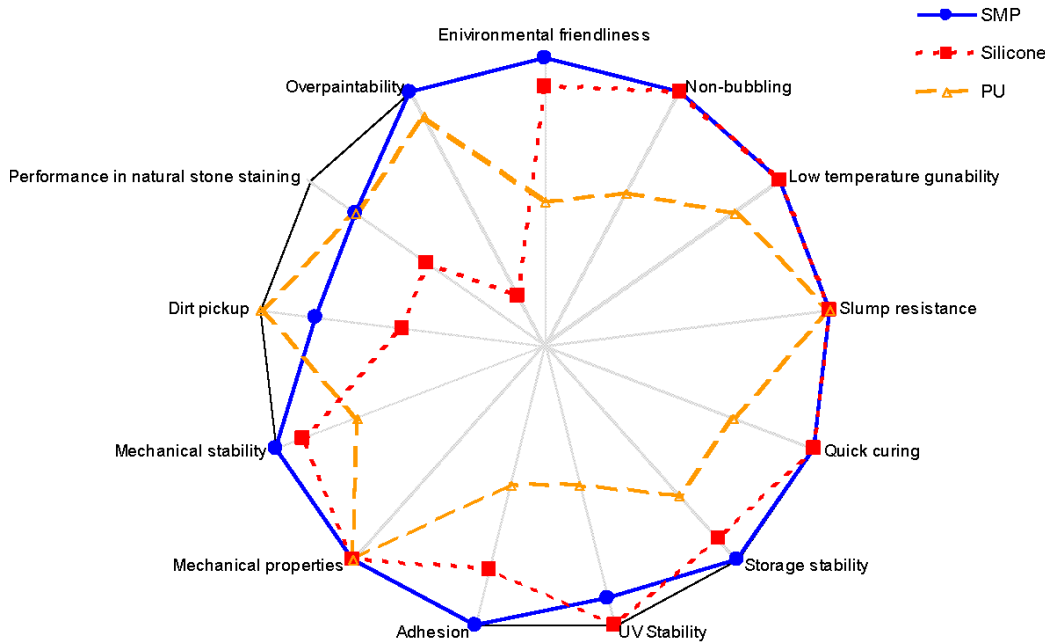

Information contained in this product data sheet conforms to the standard detail recommendations and specifications for the installation of Master Wall Inc.® products and is presented in good faith. Master Wall Inc.® assumes no liability, expressed or implied as to the architecture, engineering, or workmanship of any project. This information may be concurrent with, or superseded by other applicable documents, such as specifications and details. Contact Master Wall Inc.® for the most current product information. ©2024 Master Wall Inc.®

