



PRODUCT DATA

VINTIQUE

Vintique is used as an antiquing stain to simulate century old plaster. Using a variety of artistic techniques, it's designed to create a faux finish while maintaining the durability of our Master Wall Finishes.

FEATURES & BENEFITS

- Semi-translucent
- Spray on/sponge off
- Standard Colors: White, Brown, Black
- 16 New Colors, custom colors available
- Apply over white or tinted finishes
- 100% Acrylic Polymers for durability
- Water-based - easy clean up with water

Application Temperature: 40°-110°F (5°-43°C) Working Time: 1/4 hr.
Set Time: 8-12 hrs. Dry Time: 48-72 hrs. at room temperature, working and drying time will vary with temperature and humidity.

JOB CONDITIONS

Air and substrate temperature for application of Vintique must be 45°F (7°C) or higher and must remain 45°F (7°C) or higher for a minimum of 24 hours. Provide temporary protection to protect the wall system from damage until permanent flashings, caps and sealants are installed. Store materials within prescribed temperature limits and out of direct sun-light. High temperatures will reduce working times, Low temperatures and/or high humidity and pigment loading will extend working, set and dry times.

PREPARATION

The substrate must be approved by Master Wall Inc.®, clean, dry, structurally sound and free of efflorescence, oil, grease, form release agents and curing compounds or anything that would affect bond.

MIXING

Add the tint vial (if not pre-tinted) and thoroughly stir Vintique into a homogenous consistency. Small amounts of clean, potable water may be added to obtain a workable consistency. Do not over mix. Do not exceed 24 ounces (0.7L) of water per pail. Do not add accelerators or retarders to Vintique. Vintique will need to be continually agitated during application. Do not allow to settle.

APPLICATION

Vintique can be applied by spray bottle, brush, roller, garden type sprayer, sponge or airless spray equipment. Typically Vintique is spray applied then sponged off to create the desired effect. The final appearance of Vintique depends on the individual applicator and job site mock-ups are recommended. See our technical bulletin for additional techniques. If sagging or running occurs use a brush, sponge, clean rag or roller to correct immediately. Check wall throughout the application to ensure that uniformity and the desired appearance is achieved.

Coverage per pail (sf/m²)*

1000-1200 (90-110)

**All coverage is approximate and depend upon substrate, details and individual application*

Packaging/Shelf Life/Storage

Packaging: 5 gallon (19 L) pail

Shelf Life: 2 years

Storage: Protect from extreme heat - 90°F (32°C), freezing and direct sunlight.

Hazard: This chemical is not considered hazardous according to the OSHA Hazard Communication Standard 2012 (29 CFR 1910.1200).

VOC: Less than 50 g/L.

See Vintique for other technical properties


Approved Substrates

- Superior Finishes
- Master Wall Specialty Finishes
- Master Wall Coatings
- ReCote™
- Others approved in writing

Warning: KEEP CONTAINER CLOSED WHEN NOT IN USE. KEEP OUT OF THE REACH OF CHILDREN. NOT FOR INTERNAL CONSUMPTION. FOR INDUSTRIAL USE ONLY. Consult the Safety Data Sheet (SDS) in the Products section at masterwall.com for further health and safety information.

LIMITED WARRANTY

This product is subject to a written limited material or system warranty. Obtain a warranty from the Tech Support tab of our website. Refer to Specifications for more complete information on proper use and handling of this product.

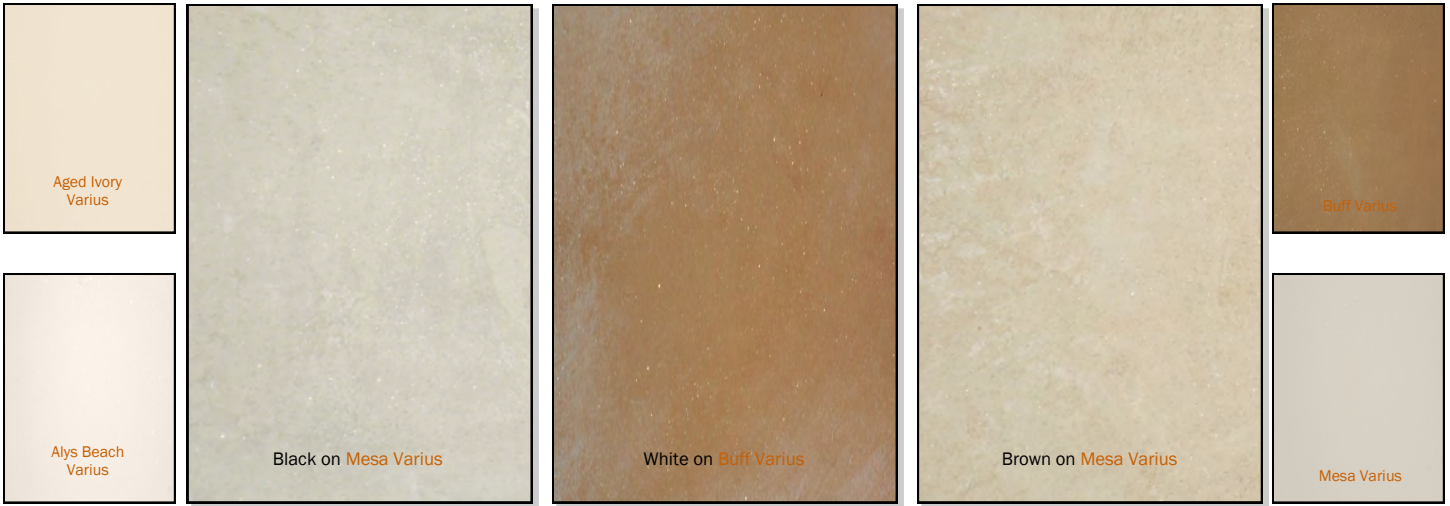

Vintage Color/Varius Color, sprayed and sponge technique





Vintique Color/*Varius Color*, sprayed and sponge technique

CLEAN UP

Tools and equipment can be cleaned with soapy water when Vintique is wet.

LIMITATIONS

Do not use Vintique as a finish directly over any Master Wall base coat.

Follow finish slope recommendations

Not for use horizontally or below grade.

Information contained in this product data sheet conforms to the standard detail recommendations and specifications for the installation of Master Wall Inc.[®] products and is presented in good faith. Master Wall Inc.[®] assumes no liability, expressed or implied as to the architecture, engineering, or workmanship of any project. This information may be concurrent with, or superseded by other applicable documents, such as specifications and details. Contact Master Wall Inc.[®] for the most current product information. ©2024 Master Wall Inc.[®]

