



PRODUCT DATA

SUPERIOR STONE

Superior Stone Finishes uses integrally colored beads to create the look of fine granite. Applied over a tinted Primecoat Primer, Superior Stone is easily applied for an upscale look on building interiors or exteriors at a relatively low cost.

FEATURES & BENEFITS

- Fine granite look
- Eight standard colors, custom colors available
- Easily applied
- 100% Acrylic Polymers for durability
- Water-based - easy clean up with water

Application Temperature: 50°-110°F (10°-43°C) Working Time: 1 hr. Dry Time: 72 hrs. at room temperature, working and drying time will vary with temperature and humidity.

Coverage per pail (sf/m²)*

90-110 (8.5-10)

**All coverage is approximate and depend upon substrate, details and individual application*

Packaging/Shelf Life/Storage

Packaging: 5 gallon (19 L) pail

Shelf Life: 2 years

Storage: Protect from extreme heat - 90 °F (32 °C), freezing and direct sunlight.


Hazard: This chemical is not considered hazardous according to the OSHA Hazard Communication Standard 2012 (29 CFR 1910.1200).

VOC: Less than 50 g/L.

See Superior Stone for other technical properties

Approved Substrates

- Primed Master Wall® Base Coats
- Primed Interior Drywall
- Others approved in writing

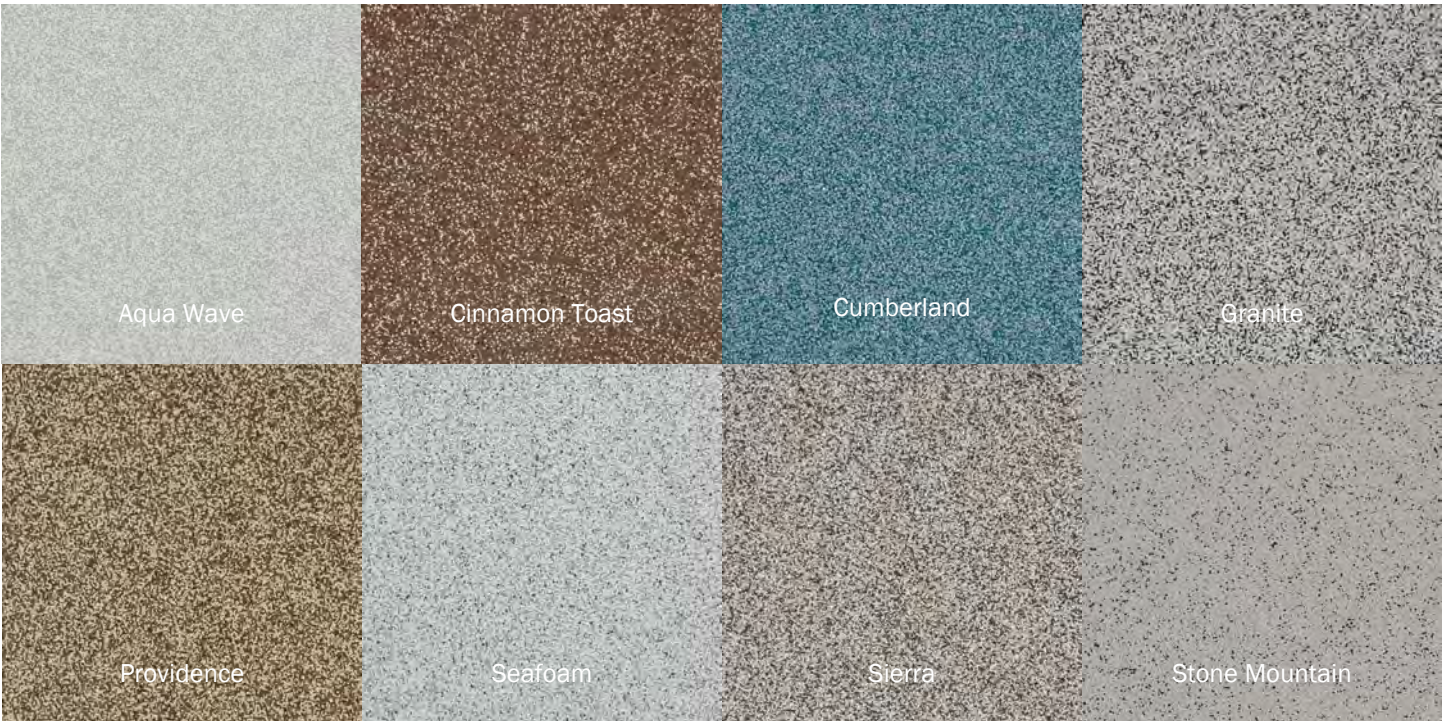

APPLICATION PROCEDURE

General—Air and substrate temperature for application of *Superior Stone* must be 50°F (10°C) or higher and must remain 50°F (10°C) or higher for a minimum of 24 hours. Working and drying times are based upon normal room temperature conditions and will vary with temperature and humidity. Dry time will vary, typically 8-12 hours to firm set and 48-72 hours to fully dry at room temperature.

Preparation - The substrate must be approved by Master Wall Inc., clean, dry, structurally sound and free of efflorescence, oil, grease, form release agents and curing compounds or anything that would affect bond. Painted surfaces are not acceptable and must be removed. Concrete and surfaces should cure for a minimum of 28 days. Stucco should be cured until clean, dry and hard—typically 14 days.

Interior drywall should be finished and made ready for paint. Prime surfaces with *Sanded Primecoat* primer prior to finishing with *Superior Stone*.

Base Coats - Must be flat, dry hard, and free of efflorescence. Master Wall base coats must cure a minimum of 12 hours before application of Superior Finish. Substrates of brick, masonry or concrete should be leveled smooth using either Master Wall base coats or stucco.

Mixing—Thoroughly stir the *Superior Stone Finish* using a heavy duty 1/2" (12.7 mm) drill at 400-500 rpm and a paddle similar to a Wind-lock B-MTW mixer. Small amounts of clean, potable water may be added to obtain a workable consistency. To avoid texture or coverage variations, add the same amount of water to each pail. Don't exceed 24 ounces (0.7 L) of water per pail.

Application—Prime the surface with Master Wall *Primecoat* or *Sanded Primecoat* tinted to match the predominate color of stone in the selected *Superior Stone* color. Allow Primecoat to dry a minimum of 12 hours prior to finish coat application.

Superior Stone Finish should be applied in two coats. The first coat can be trowel or spray applied.

Trowel Application—Apply the *Superior Stone Finish* to the clean, dry and cured base coat with a stainless steel trowel. Trowel finish uniformly then scrape down to a thickness equal to the size of the aggregate. Trowel to eliminate trowel marks and irregularities.

Spray Application—Using a conventional plaster hopper gun or a proven pump, spray two coats of the finish over the primed base coat to achieve the desired texture. If the first coat was trowel applied, a minimum of one spray coat is required as the finish coat. Use a circular overlapping pattern keeping the spray gun at a 90° angle to the surface maintaining the same distance to the wall at all times. The first coat should dry a minimum of one hour prior to the application of the second coat. Be cautious of flooding an area with too much finish as it may appear shinier and more textured when it dries.

Clean Up—Tools and equipment can be cleaned with soapy water while the finish coat is still wet.

For Professional Results

Apply finish coats away from direct sunlight.

Surfaces exposed to the weather must be sloped (6:12 minimum recommended).

Finishes are intended for the approved substrates listed above and should not be applied directly to gypsum board or insulation board products except as noted above.

Information contained in this product data sheet conforms to the standard detail recommendations and specifications for the installation of Master Wall Inc.® products and is presented in good faith. Master Wall Inc.® assumes no liability, expressed or implied as to the architecture, engineering, or workmanship of any project. This information may be concurrent with, or superseded by other applicable documents, such as specifications and details. Contact Master Wall Inc.® for the most current product information. ©2024 Master Wall Inc.®



Health & Safety

WARNING! Causes eye and skin irritation. Precautionary Statement Wash hands thoroughly after handling. Wear protective gloves/protective clothing/eye protection/face protection.

FIRST AID MEASURES

Eye Contact: Immediately flush eyes with plenty of water for at least 15 to 20 minutes. Ensure adequate flushing of the eyes by separating the eyelids with fingers. Get immediate medical attention.

Skin Contact: Immediately wash skin with plenty of soap and water for 15 to 20 minutes, while removing contaminated clothing and shoes. Get medical attention if irritation develops or persists.

Inhalation: If inhaled, remove to fresh air. If not breathing, give artificial respiration or give oxygen by trained personnel. Seek immediate medical attention.

Ingestion: If swallowed, do NOT induce vomiting. Call a physician or poison control center immediately. Never give anything by mouth to an unconscious person. Store locked up. Dispose of contents/container in accordance with Local, State, Federal and Provincial regulation.

Spills: Collect with suitable absorbent material such as cotton rags.

Disposal: Dispose of in accordance with local, state or federal regulations.

Warning: KEEP CONTAINER CLOSED WHEN NOT IN USE. KEEP OUT OF THE REACH OF CHILDREN. NOT FOR INTERNAL CONSUMPTION. FOR INDUSTRIAL USE ONLY. Consult the Safety Data Sheet (SDS) in the Products section at masterwall.com for further health and safety information.

LIMITED WARRANTY

This product is subject to a written limited material or system warranty. Obtain a warranty from the Tech Support tab of our website. Refer to Specifications for more complete information on proper use and handling of this product.